



# AUSONIA

OUR ENERGY, YOUR POWER



## TECHNICAL DATA

## VO0500SWD

### GENSET SPECIFICATIONS

Prime Power (PRP)	500 KVA	400 kW
Stand-by (LTP)	550 kVA	440 kW
Power factor (cosphi)	0,8	
Voltage	400/230 V	
Frequency	50 Hz	

### ENGINE SPECIFICATIONS

Brand	VOLVO PENTA	
Type	TAD 1641 GE	
Net engine power prime	430 kW	
Net engine power stand-by	473 kW	
Aspiration	TCA	
Cycle	diesel 4 stroke	
Cooling	water	
Speed	1500 r.p.m.	
Cylinders	6 L	
Bore x stroke	144 x 165 mm	
Displacement	16,12 l	
Fuel consumption 75% prime power	75 l/h +/- 5%	
Oil consumption	0,1% of fuel consumption	
Oil sump capacity	48 l	
Coolant system capacity (engine & radiator)	60 l	
Standard voltage	24 V	
Governor type	electronic	

### ALTERNATOR SPECIFICATIONS

Power (PRP)	500 kVA
Overload	10% for 1 hour
Voltage	400/230 V
Frequency	50 Hz
Speed	1500 r.p.m.
Temperature rise	H
Insulation class	H
Degree of protection	IP 23

### STANDARD EQUIPMENT

Starting motor and alternator battery charger
Dry air filter with removable element
Radiator mounted on skidbase
Water preheating system
Protection for fan and moving parts
Exhaust gas silencer
Built-in fuel tank 120 l
First filling oil
Skidbase with antivibrating shock-absorbers
Lead type batteries with cables and tray
Lifting devices
4-pole circuit breaker in fixed configuration, manual control

#### Rating according ISO 8528

##### Prime Power (PRP)

It is defined as being the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output over 24 h of operation shall not exceed 70% of the prime power. A 10% overload capacity is available for a period of 1 hour within a 12-hour period of operation.

##### Limited-Time Running Power (LTP)

It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 h of operation per year (of which no more than 300 for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. No overload capability is available.





TECHNICAL DATA

## VO0500SWD

### CONTROL PANEL

- Genset control with automatic management of load transfer DG/Mains
- Controller with thresholds, counters, alarm, status
- LCD display with pushbutton access for monitoring electrical and mechanical parameters
- Advanced programmable I/O functions
- Multilanguages text for measurements setting and messages
- Remote communication interface
- List of events
- Static battery charger

### SOUNDPROOFED CANOPY


- Highly corrosionproof
- Electrogalvanized steel structure with modular components
- Antianimal protection grid (air intake)
- Exhaust silencer with rain flap
- Insulation with material in fire reaction class A1
- Doors with yale type key
- Emergency stop
- Easy connections for cables installation

### AVAILABLE OPTIONS

- Different soundproofing levels for canopied gensets
- Solutions for arctic or hot environment
- A wide selection of genset controllers and synch panels
- Additional alarms (warning / shutdown)
- Extended fuel tank capacity
- Automatic refuelling kit
- Automatic transfer switch panel (ATS)
- Residential Silencer (for open set only)
- Leak proof tray
- Special tools

### DIMENSIONS AND WEIGHTS

Open set on skid base	LxWxH: mm 3200x2020x2070	Dry: kg 4260
Soundproofed canopy Silent version	LxWxH: mm 4800x2020x2400	Dry: kg 5160

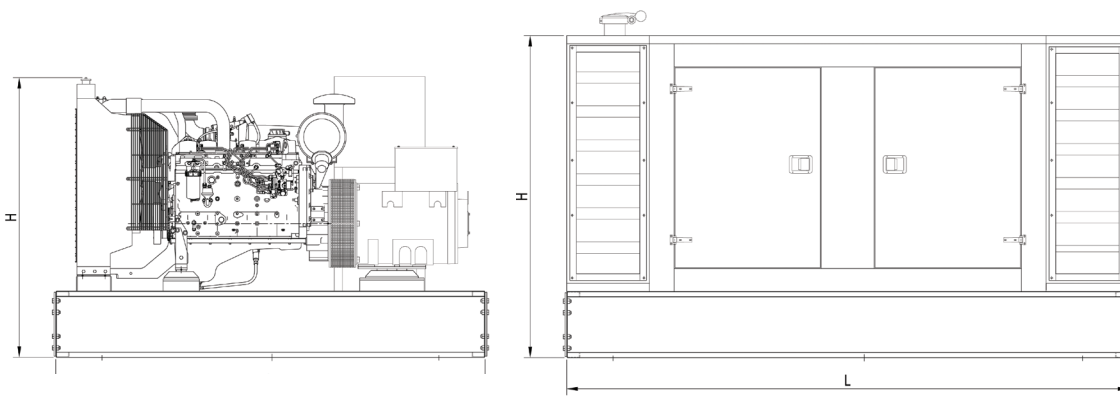

For further information on our standard and optional features, please contact our sales office at: [sales@ausonia.net](mailto:sales@ausonia.net)

